


70°-100° F (Install temp.)

- 1 This product is designed to be placed inside the window channel. Lower the window. Buff inside felt surface with Scotch-Brite pad. Clean window channel with alcohol pad.
- 2 Apply one coat of surface prep to rubber window channel. Prep both sides before visor installation.
- 3 Remove the tape liner from front and rear flanges. Peel back 2" of tape liner from each end of top flange.
- 4 Insert visor into window channel, front flange first. Front flange inserts **between rubber trim and the mirror cap**. Remove tape liner by pulling on free ends. Apply pressure along flanges to secure. Raise window and leave up for 24 hours to ensure adhesion.
- 5 Install rear visor using same method as front.



IMPORTANT: Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.
Stampede Automotive Products • Visit us at stampedeproducts.com • 800-241-7219

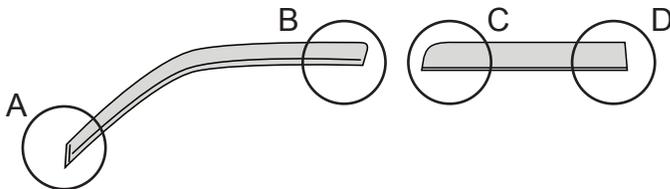

70°-100° F (Install temp.)

- 1 This product is designed to be placed inside the window channel. Lower the window. Buff inside felt surface with Scotch-Brite pad. Clean window channel with alcohol pad.
- 2 Apply one coat of surface prep to rubber window channel. Prep both sides before visor installation.
- 3 Remove the tape liner from front and rear flanges. Peel back 2" of tape liner from each end of top flange.
- 4 Insert visor into window channel, front flange first. Front flange inserts **between rubber trim and the mirror cap**. Remove tape liner by pulling on free ends. Apply pressure along flanges to secure. Raise window and leave up for 24 hours to ensure adhesion.
- 5 Install rear visor using same method as front.



IMPORTANT: Clean with a **SOFT** cloth and soap and water **ONLY!** Using abrasive cleaners, chemicals, or solvents will **VOID** the warranty on this product.
Stampede Automotive Products • Visit us at stampedeproducts.com • 800-241-7219